


## DS-2CE16C2T-IT1/IT3

### HD720P Turbo HD EXIR Bullet Camera




## EXIR

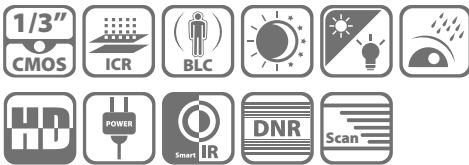

#### Key features

- HD720P Video Output
- Adopt HDTV I Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40m IR distance
- IP66 weatherproof

#### Dimensions

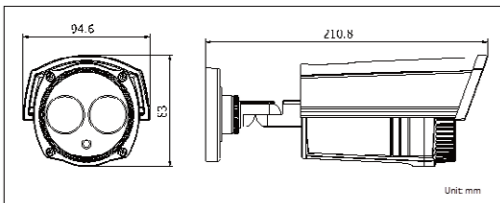

#### Accessories



Video balun  
DS-1H18

#### Available models

DS-2CE16C2T-IT1  
DS-2CE16C2T-IT3

	DS-2CE16C2T-IT1	DS-2CE16C2T-IT3
<b>Camera</b>		
Image Sensor	1 / 3" Progressive Scan CMOS	
Signal System	PAL / NTSC	
Effective Pixels	1280(H)*720(V)	
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR	
Shutter speed	1/25(1/30) s to 1/50,000 s	
Lens	3.6mm (2.8mm, 6mm, 8mm optional)	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm), 36.8°(8mm)	Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm), 36.8°(8mm), 24.33°(12mm), 18.4°(16mm)
Lens Mount	M12	
Day & Night	ICR	
Synchronization	Internal synchronization	
Video Frame Rate	25 fps (PAL) / 30 fps (NTSC)	
HD Video Output	1 Analog HD output	
S / N Ratio	More than 52dB	
<b>General</b>		
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)	
Power Supply	12V DC	
Power Consumption	Max. 3W	Max. 4W
Weather Proof Ratings	IP66	
IR Range	Up to 20m	Up to 40m
Dimensions	94.6×83×210.8mm(3.72"×3.27"×8.30")	
Weight	700 g (1.54 lbs)	